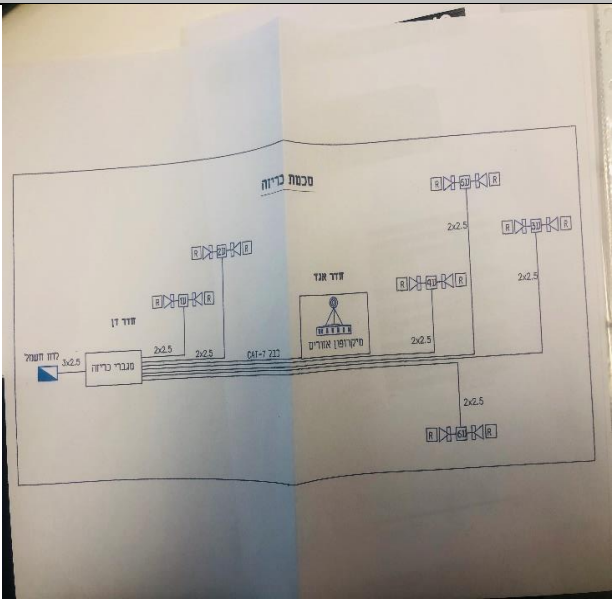

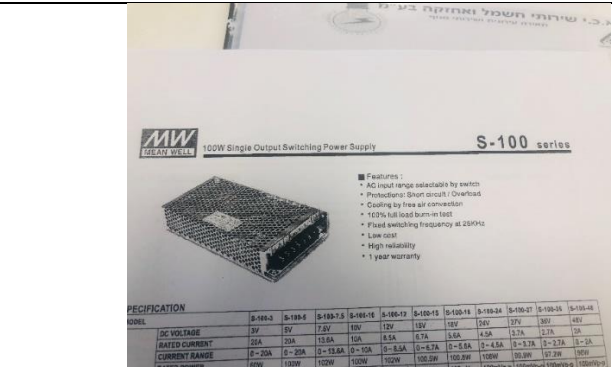
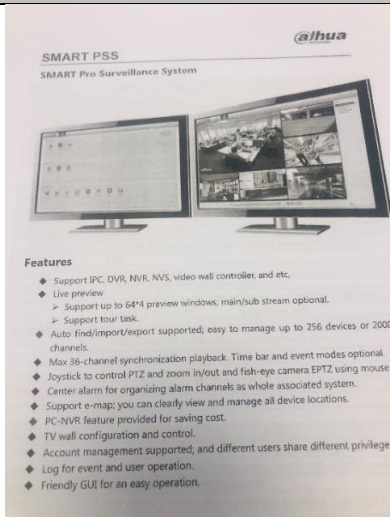
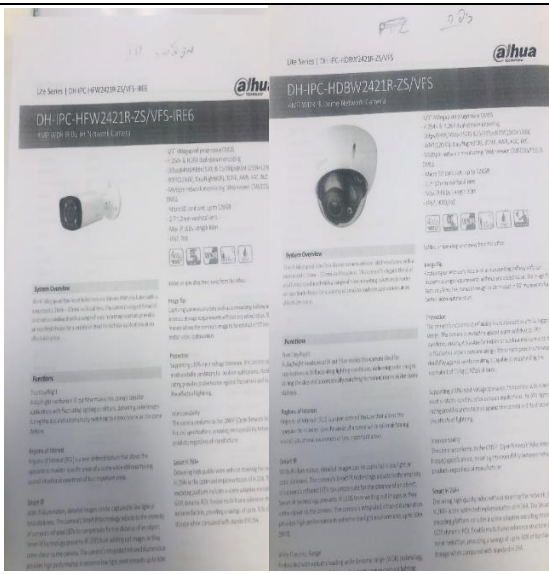


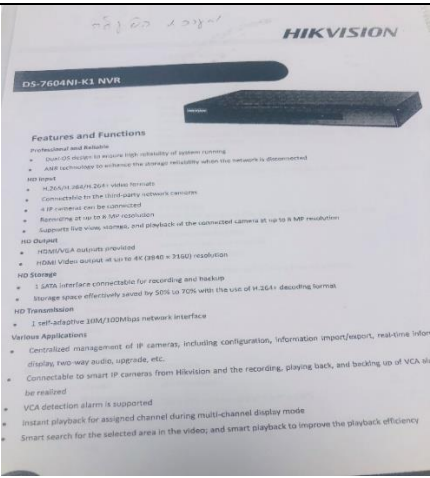
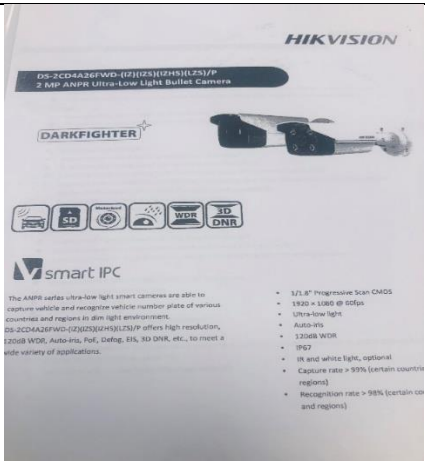


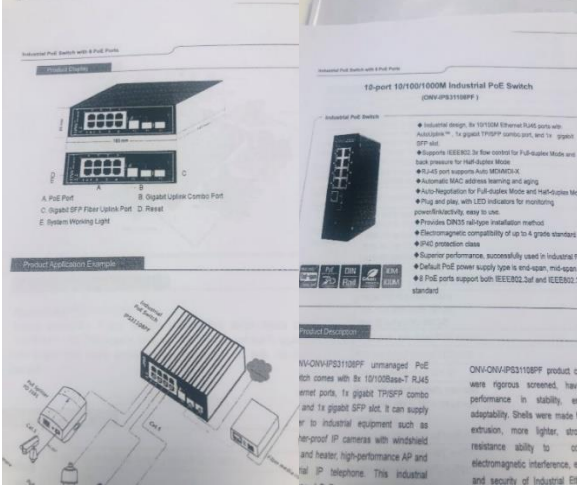
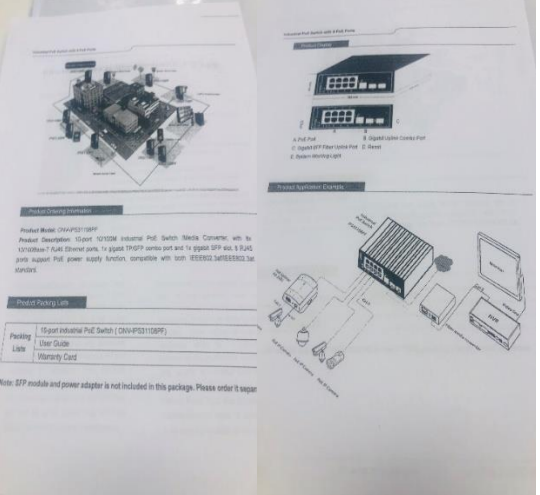



מסוף סבידור נספח טכני

הערות	מפרט / תרשים	מס'																																																							
<p>מערכת כריזה – תרשים.</p>		1																																																							
<p>מגבר כריזה – מערכת.</p>		2																																																							
<p>סוויצ'י כריזה – מערכת.</p>	 <p> Features: • AC input range selectable by switch • Protection: Short circuit / Overload • Cooling by free air convection • 100% full load burn-in test • High switching frequency at 25kHz • Low noise • High reliability • 1 year warranty </p> <table border="1"> <thead> <tr> <th>SPECIFICATION</th> <th>S-100-2</th> <th>S-100-5</th> <th>S-100-7.5</th> <th>S-100-10</th> <th>S-100-15</th> <th>S-100-18</th> <th>S-100-24</th> <th>S-100-27</th> <th>S-100-35</th> <th>S-100-45</th> </tr> </thead> <tbody> <tr> <td>DC VOLTAGE</td> <td>24V</td> <td>5V</td> <td>7.5V</td> <td>10V</td> <td>15V</td> <td>18V</td> <td>24V</td> <td>27V</td> <td>35V</td> <td>45V</td> </tr> <tr> <td>RATED CURRENT</td> <td>2.5A</td> <td>1.0A</td> <td>1.25A</td> <td>1.0A</td> <td>0.5A</td> <td>0.75A</td> <td>0.5A</td> <td>0.5A</td> <td>0.75A</td> <td>1.0A</td> </tr> <tr> <td>CURRENT RANGE</td> <td>0-2.5A</td> <td>0-1.0A</td> <td>0-1.25A</td> <td>0-1.0A</td> <td>0-0.5A</td> <td>0-0.75A</td> <td>0-0.5A</td> <td>0-0.5A</td> <td>0-0.75A</td> <td>0-1.0A</td> </tr> <tr> <td>POWER</td> <td>60W</td> <td>50W</td> <td>93.75W</td> <td>100W</td> <td>150W</td> <td>135W</td> <td>120W</td> <td>135W</td> <td>31.5W</td> <td>45W</td> </tr> </tbody> </table>	SPECIFICATION	S-100-2	S-100-5	S-100-7.5	S-100-10	S-100-15	S-100-18	S-100-24	S-100-27	S-100-35	S-100-45	DC VOLTAGE	24V	5V	7.5V	10V	15V	18V	24V	27V	35V	45V	RATED CURRENT	2.5A	1.0A	1.25A	1.0A	0.5A	0.75A	0.5A	0.5A	0.75A	1.0A	CURRENT RANGE	0-2.5A	0-1.0A	0-1.25A	0-1.0A	0-0.5A	0-0.75A	0-0.5A	0-0.5A	0-0.75A	0-1.0A	POWER	60W	50W	93.75W	100W	150W	135W	120W	135W	31.5W	45W	3
SPECIFICATION	S-100-2	S-100-5	S-100-7.5	S-100-10	S-100-15	S-100-18	S-100-24	S-100-27	S-100-35	S-100-45																																															
DC VOLTAGE	24V	5V	7.5V	10V	15V	18V	24V	27V	35V	45V																																															
RATED CURRENT	2.5A	1.0A	1.25A	1.0A	0.5A	0.75A	0.5A	0.5A	0.75A	1.0A																																															
CURRENT RANGE	0-2.5A	0-1.0A	0-1.25A	0-1.0A	0-0.5A	0-0.75A	0-0.5A	0-0.5A	0-0.75A	0-1.0A																																															
POWER	60W	50W	93.75W	100W	150W	135W	120W	135W	31.5W	45W																																															

הערות	מפרט / תרשים	מס'
מערכת ממוחשבת למצלמות.	 <p>SMART PSS SMART Pro Surveillance System</p> <p>Features</p> <ul style="list-style-type: none"> Support IPC, DVR, NVR, NVS, video wall controller and etc. Live preview <ul style="list-style-type: none"> Support up to 64*4 preview windows; main/sub stream optional. Support four task. Auto find/import/export supported, easy to manage up to 256 devices or 2000 channels. Max 36-channel synchronization playback. Time bar and event modes optional. Joystick to control PTZ and zoom in/out and fish-eye camera EPTZ using mouse. Center alarm for organizing alarm channels as whole associated system. Support e-map you can clearly view and manage all device locations. PC-NVR feature provided for saving cost. TV wall configuration and control. Account management supported, and different users share different privilege. Log for event and user operation. Friendly GUI for an easy operation. 	4
מצלמות.	 <p>DH-IPC-HFW2421R-ZS/VFS-REG 4MP 25FPS PTZ Fisheye Camera</p> <p>DH-IPC-HDBW2421R-ZS/VFS 4MP 25FPS PTZ Fisheye Camera</p> <p>System Overview</p> <p>Features</p> <p>System Overview</p> <p>Features</p> <p>System Overview</p> <p>Features</p>	5
מצלמה	 <p>DH-SD5922SU-HNI 2MP 25FPS PTZ Fisheye Camera</p> <p>System Overview</p> <p>Features</p> <p>System Overview</p> <p>Features</p>	6

הערות	מפרט / תרשים	מס'
רכיבי מערכת המצלמות.	 <p>Fiber Optic Modular Patch Panel Features</p> <ul style="list-style-type: none"> Very high density, supports up to 24 duplex LC adapters (48 fibers) in 1U of rack space Pullout drawer enables ease of access to the fiber Wide range of fiber optic cabling management accessories, management clip, splice cassettes, cable entry gland and more Single-Mode and Multi-Mode adapter available <p>DH-NVR4204/4208/4216/4232 4/8/16/32CH 1U Network Video Recorder</p> <p>Features</p> <ul style="list-style-type: none"> Up to 4/8/16/32 channel IP camera input H.264/265 dual codec decoding Max 200Mbps incoming bandwidth Up to 3Mbps resolution preview/playback HDMI/VGA simultaneous video output 4/8/16 channel synchronous realtime playback, GPO interface Support Multi-brand network cameras: Dahua, Aicon Vision, AXIS, Bosch, IP Plus, Honeywell, Panasonic, Pelco, Samsung, Sanyo, Sony, Videotec, Vivotek ONVIF Version 2.4 compliance 3D intelligent positioning with Dahua PTZ camera Support 2 SATA HDDs up to 8TB, 2 USB2, USB3.0 Multiple network monitoring: Web viewer, CMS/DSS/PSIS & DMES 	7
מערכת הפעלה ממחשבת LPR	 <p>HIKVISION DS-7604NI-K1 NVR</p> <p>Features and Functions</p> <p>Professional and Reliable</p> <ul style="list-style-type: none"> Smart design to ensure high reliability of system running ABS technology to enhance the storage reliability when the network is disconnected <p>HD Input</p> <ul style="list-style-type: none"> 4x DVI-D/2x DVI-I video inputs Connectable to 2x 10Gb SFP network cameras 4 IP cameras can be connected Recording at up to 8 MP resolution Supports live view, storage, and playback of the connected camera at up to 8 MP resolution <p>HD Output</p> <ul style="list-style-type: none"> HDMI/VGA outputs provided HDMI Video output at up to 4K (3840 × 2160) resolution <p>HD Storage</p> <ul style="list-style-type: none"> 1 SATA interface connectable for recording and backup Storage space effectively saved by 50% to 70% with the use of H.264+ decoding format <p>HD Transmission</p> <ul style="list-style-type: none"> 1 SFP-adaptive 10Gb/100Mbps network interface <p>Various Applications</p> <ul style="list-style-type: none"> Centralized management of IP cameras, including configuration, information import/export, real-time information display, two-way audio, upgrade, etc. Connectable to smart IP cameras from Hikvision and the recording, playing back, and backing up of VCA can be realized VCA detection alarm is supported Instant playback for assigned channel during multi-channel display mode Smart search for the selected area in the video; and smart playback to improve the playback efficiency 	8
מצלמות lpr .	 <p>HIKVISION DS-2CD4426FWD-01(20) Smart IPC 2 MP Auto-Lens-Low Light Bullet Camera</p> <p>DARKFIGHTER</p> <p>smart IPC</p> <p>The ASPD auto lens ultra-low light smart camera are able to capture vehicle and recognize vehicle number plate of various countries and regions in dim light environment.</p> <p>DS-2CD4426FWD-01(20) Smart IPC offers high resolution, 120dB WDR, Auto-Iris, Fov, Diopt, EIS, HD DNR, etc., to meet a wide variety of applications.</p> <ul style="list-style-type: none"> 1/2.8" Progressive Scan CMOS 1920 × 1080 @ 30fps Ultra-low light Auto-Iris 120dB WDR IPG IR and white light, optional Capture rate > 99% (certain countries/regions) Recognition rate > 98% (certain countries/regions) 	9

מס'	מפרט / תרשים	הערות
10	 <p>Industrial PoE Switch with 8 PoE Ports</p> <p>Industrial PoE Switch with 8 PoE Ports</p> <p>10-port 10/100/1000M Industrial PoE Switch (OVV-IPS3110BPP)</p> <p>Industrial PoE Switch</p> <ul style="list-style-type: none"> Industrial design, the 10/100M Ethernet RJ45 ports with AutoSense™ 1x gigabit TP/SFP combo ports, and 1x gigabit SFP slot. Supports IEEE802.3x flow control for Full-duplex Mode and back pressure for Half-duplex Mode. Multi-port support for Auto-SENSE/MDIX. Automatic MAC address learning and aging. Auto-Negotiation for Full-duplex Mode and Half-duplex Mode. Plug and play, with LED indicators for monitoring power/temperature, error to user. Provides DNS/DHCP relay/translation method. Electromagnetic compatibility of up to 4 grades standard. IPAD protection class. Excellent performance, successfully used in industrial T Default PoE power supply type is end-span, mid-span 8 PoE ports support both IEEE802.3af and IEEE802.3at standard. <p>Product Description</p> <p>OVV-ONS-IPS3110BPP unmanaged PoE switch comes with 8x 10/100Base-T RJ45 ether ports, 1x gigabit TP/SFP combo and 1x gigabit SFP slot. It can supply power to industrial equipment such as her-proof IP cameras with windshield and heater, high-performance AP and industrial IP telephone. This industrial</p> <p>OVV-ONS-IPS3110BPP product is with rigorous screened, high performance in stability, its adaptability. Shells were metal extrusion, more lighter, static resistance ability to resist electromagnetic interference, and security of industrial field.</p>	<p>תקשורת ארון ורכיביו.</p>
11	 <p>Industrial PoE Switch with 8 PoE Ports</p> <p>Industrial PoE Switch with 8 PoE Ports</p> <p>10-port 10/100/1000M Industrial PoE Switch (OVV-IPS3110BPP)</p> <p>Industrial PoE Switch</p> <ul style="list-style-type: none"> Industrial design, the 10/100M Ethernet RJ45 ports with AutoSense™ 1x gigabit TP/SFP combo ports, and 1x gigabit SFP slot. Supports IEEE802.3x flow control for Full-duplex Mode and back pressure for Half-duplex Mode. Multi-port support for Auto-SENSE/MDIX. Automatic MAC address learning and aging. Auto-Negotiation for Full-duplex Mode and Half-duplex Mode. Plug and play, with LED indicators for monitoring power/temperature, error to user. Provides DNS/DHCP relay/translation method. Electromagnetic compatibility of up to 4 grades standard. IPAD protection class. Excellent performance, successfully used in industrial T Default PoE power supply type is end-span, mid-span 8 PoE ports support both IEEE802.3af and IEEE802.3at standard. <p>Product Description</p> <p>OVV-ONS-IPS3110BPP unmanaged PoE switch comes with 8x 10/100Base-T RJ45 ether ports, 1x gigabit TP/SFP combo and 1x gigabit SFP slot. It can supply power to industrial equipment such as her-proof IP cameras with windshield and heater, high-performance AP and industrial IP telephone. This industrial</p> <p>OVV-ONS-IPS3110BPP product is with rigorous screened, high performance in stability, its adaptability. Shells were metal extrusion, more lighter, static resistance ability to resist electromagnetic interference, and security of industrial field.</p>	<p>ארון תקשורת.</p>
12	 <p>CAME</p> <p>FAB0002-EN</p> <p>מדריך התקנה G3750</p> <p>HE</p>	<p>מחסום כניסה</p>

הערות	מפרט / תרשים	מס'
<p>מערכת מחסומים ניהול</p>		13
<p>מערכת מקומית. כריזה</p>		14
<p>מערכת כיבוי אש</p>		15